

(1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B160/21** replaces ZP/B167/16

(3) Product: **Anchor device type A**
Type: **LUX-top® SDA**

(4) Manufacturer: **ST Quadrat S.A.**
11, rue Flaxweiler
6776 Grevenmacher / Potaschberg
LUXEMBURG

(5) Address: **ST Quadrat Fall Protection S.A.**
45, rue Fuert
5410 BEYREN
LUXEMBURG

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.

(7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 21-172.

(8) The requirements of the standard are assured by compliance with

DIN EN 795:2012

DIN CEN/TS 16415:2017


(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2026-10-12.

DEKRA Testing and Certification GmbH
Bochum, 2021-10-13

signed: Kilisch
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Managing director

TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate
ZP/B160/21**
- (13) 13.1 Subject and Type
Anchor device type A
Type: LUX-top® SDA

13.2 Description

The anchor device of type LUX-top® SDA in its variants LUX-top® SDA-B, LUX-top® SDA-S and LUX-top® SDA-FZ is used as a single anchor point to secure one person against falls from a height (Fig. 1-3).

The device is screw-fastened to inclined roofs at the carrying roof construction using appropriate fastening elements; which fasteners are used depends on the type of roof construction.

The anchor device consists of a corrosion-resistant edged sheet ($t = 3 \text{ mm}$).

There are drill holes ($\varnothing 10 \text{ mm}$) at one end of the sheet which are used to accommodate the fastening elements. The user can connect his PPE to the angled eyelet to protect himself against falls from a height. The device can be loaded from any direction.

The anchor device is made of corrosion-resistant steel.

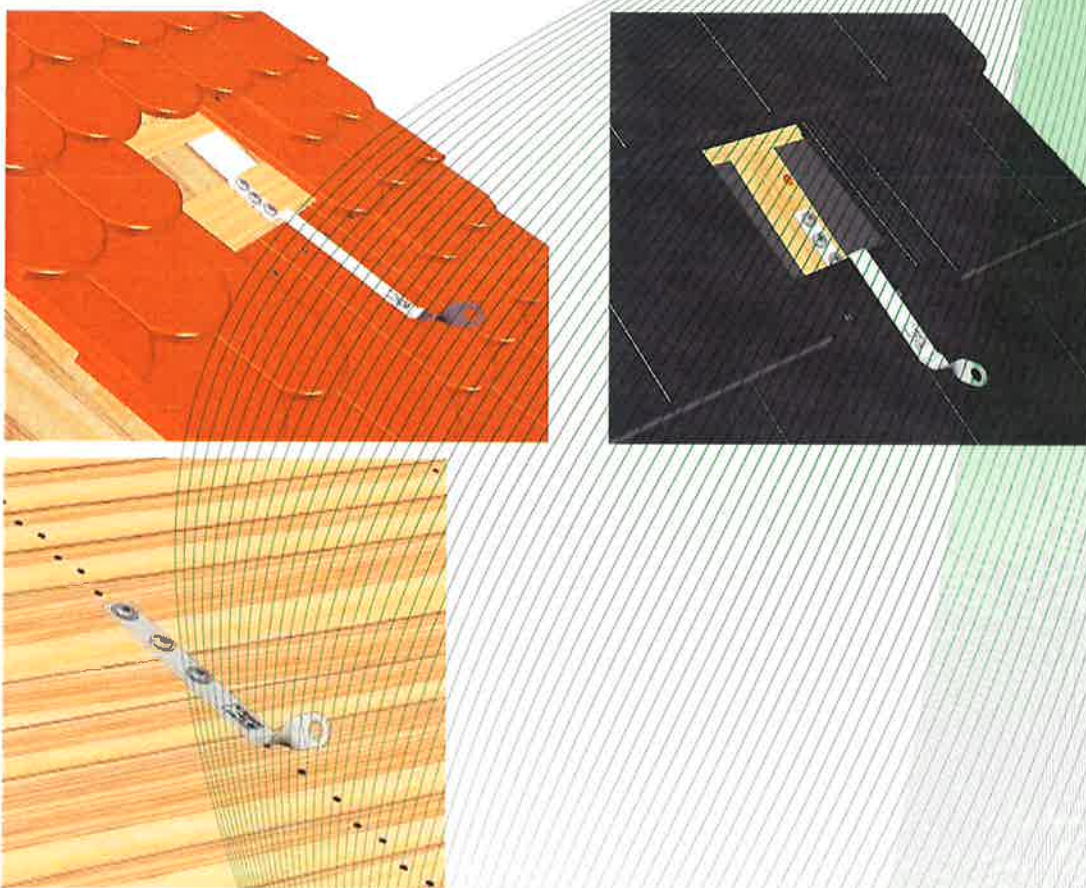


Fig. 1-3: Anchor device of type LUX-top® SDA (assembly examples)

- (14) Report

PB 21-172 dd. 2021-10-13